

OpenEVSE

Quick Start Guide

Setup and begin using your OpenEVSE charging station in no time.

Written By: Christopher Howell




Step 1 — Welcome to OpenEVSE



- Thank You for purchasing a OpenEVSE Charging Station

Step 2 — Electrical Requirements

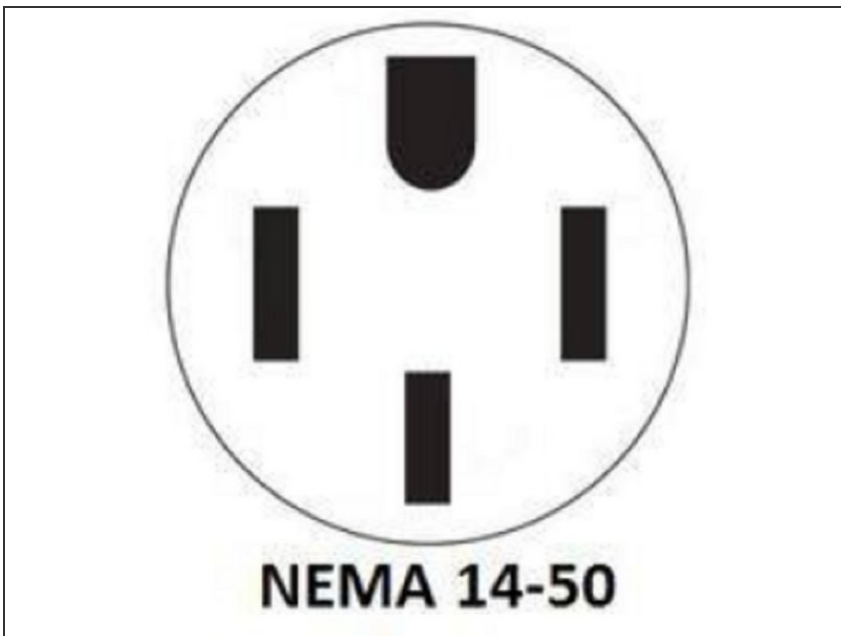

- NEMA 14-50 commonly called an "RV outlet" is recommended to charge your vehicle Level 2 at up to 40A.

Step 3 — Mount Charging Station



- Mount charging station using appropriate method for the mounting surface. Visit our online guide for more detail.
- ☑ For the full Guide Click here:
☑ [Mount your charging station.](#)
- Portable Mark 2 center holes top and bottom if you plan to use your Charging station on the road. It will be very easy to remove.
- Static For more static install, mark the 4 corner holes.

Step 4 — Color Display



- ❗ Visualize the status of your station from a distance with color
- Ready - Green
- Connected - Yellow
- Charging - Blue
- Error - Red
- Sleeping - Purple

Step 5 — Connect WiFi



- Connect charging station to your WiFi network with a phone, tablet, or computer. Visit our online guide for more detail.

★ For the full Guide Click here:

★ [Connect WiFi](#)

- Connect to the OpenEVSE WiFi Portal

⚠ Network: OpenEVSE_XXXXXX

⚠ Password: openevse

Step 6 — Connect to WiFi



- open web browser enter openevse.local or 192.168.4.1 if portal does not open automatically
- select your network
- enter your network password
- reconnect device to your network
- reconnect to openevse.local

Step 7 — Support



- Contact us with any questions
 - ① Web: openevse.com
 - ① E-mail: support@openevse.com
 - ① Phone: (877) 967-3638